


SA - 14

Hand Sprayer Semi Otomatis

SNI

8485 : 2023
LSPr-027-IDN

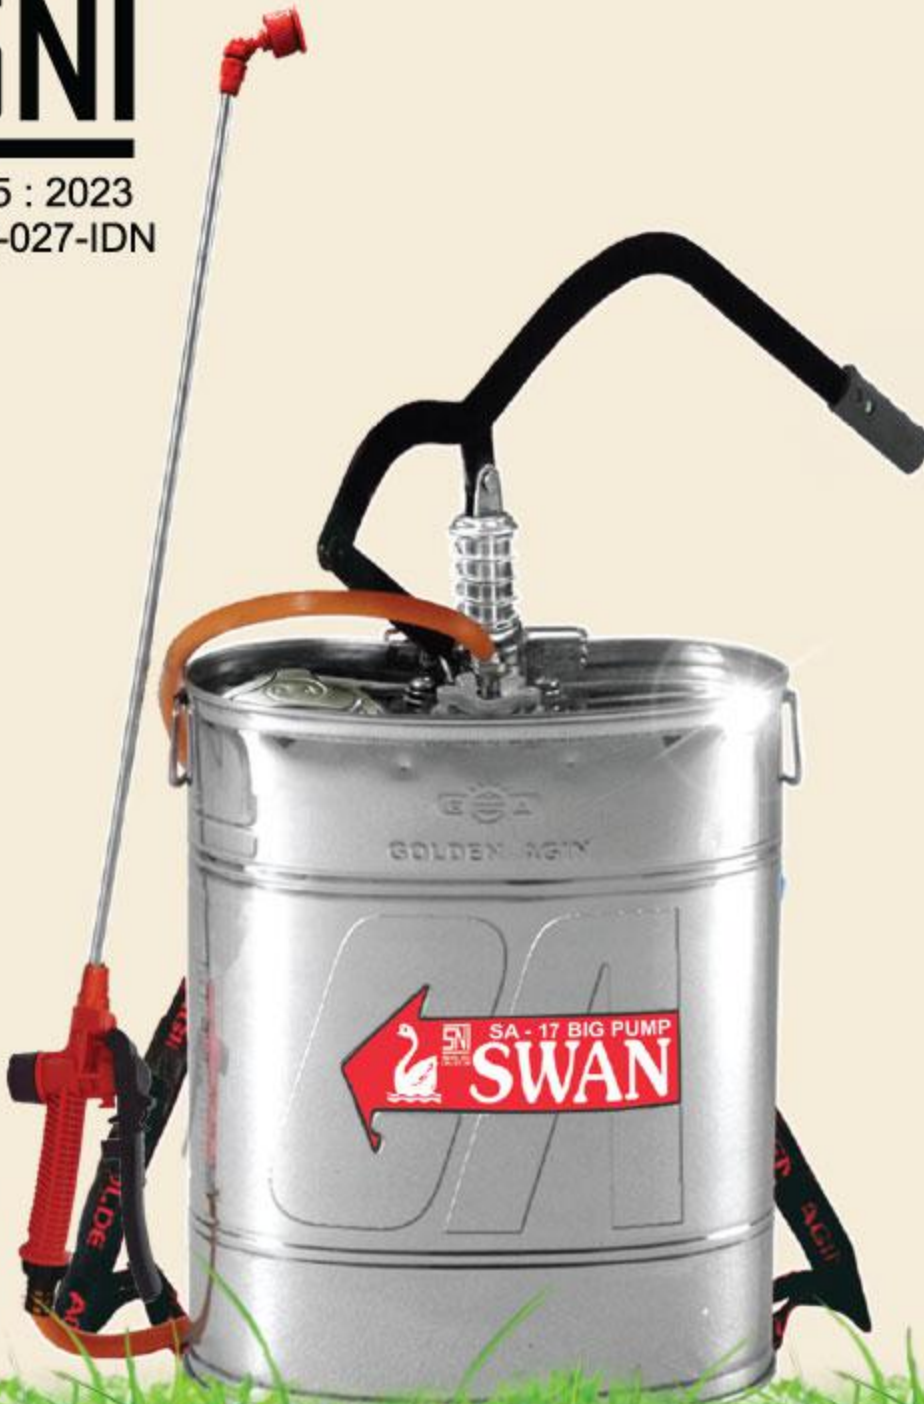

Kapasitas

14
Liter

MAX. PRESSURE

70
PSI

Spesifikasi Hand Sprayer SA-14

NO	PARAMETER / PARAMETER	UKURAN / MEASUREMENT
1	Unit Tangki / Tank Unit	
	Kapasitas Isi / Capacity	12 L
	Panjang / Length	570 mm
	Lebar / Width	150 mm
	Tinggi / Height	940 mm
	Bahan / Material	Stainless Steel
2	Unit Selang & Pipa / Hose Unit & Pipe	
	Panjang Selang / Hose Length	1300 mm
	Diameter Luar Selang / Hose Diameter	13.7 mm
	Panjang Pipa Penyemprot / Pipe Lance Length	530 mm
	Bahan Selang / Hose Material	PVC
	Bahan Pipa Penyemprot / Pipe Lance Material	Stainless Steel
3	Unit Pompa / Pump Unit	
	Jenis / Type	Pipa Torak Bolak Balik / Pump Piston
	Unit Spuyer / Nozzle Unit	
	Tipe Spuyer / Nozzle Type	Spuyer Kipas, Spuyer kerucut & Spuyer 4 Lubang. / Fan Nozzle, Cone Nozzle & 4 Holes Nozzle.
	Jumlah / Quantity	3 Pcs
	Lebar Sabuk / Strap Belt Width	35 mm
	Berat Kosong / Empty Weight	4,61 kg
	Berat Isi / Weight Content	17,90 kg
	Tekanan Semprot / Working Pressure	2,8 kg/cm ²
	Debit Semprot / Spray Discharge	Spuyer Kipas : 1,91 l/min. Fan Nozzle : 1,91 l/min. Spuyer Kerucut 1 Lubang : 0,87 l/min. Cone Nozzle : 0,87 l/min. Spuyer Kerucut 4 Lubang : 1,74 l/min. 4 Holes Nozzle : 1,74 l/min.
	Sudut Semprot / Spray Angle	Spuyer Kipas : 140° . Fan Nozzle : 140° Spuyer Kerucut 1 Lubang : 75° . Cone Nozzle : 75° Spuyer Kerucut 4 Lubang : 100° . 4 Holes Nozzle : 100°



www.golden-agin.com



swansprayer



PT. GOLDEN AGIN NUSA
Agricultural Sprayer Industry

Jl. Alternatif Tengsaw - Brantamulya Kp. Babakan RT 003 RW 05 Kel. Tarikolot,
Kec. Citeureup Kab. Bogor, Jawa Barat.
Telp : (62 - 21) 6669 - 2030, Fax: (62 - 21) 6669 - 2580, 6669 - 2659
Email : marketing@golden-agin.com

